




TRACTOR **PLOUGHS**

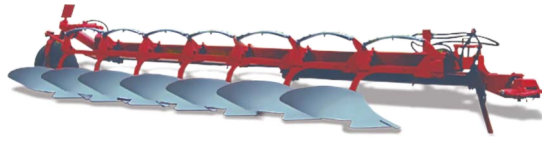

PPN.7.30/50
SEMI-MOUNTED
For conventional plowing

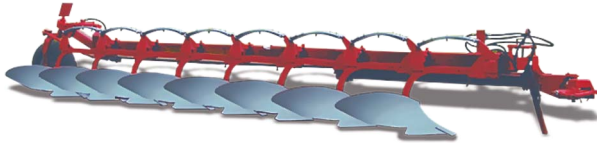

PPN.8.30/50
SEMI-MOUNTED
For conventional plowing

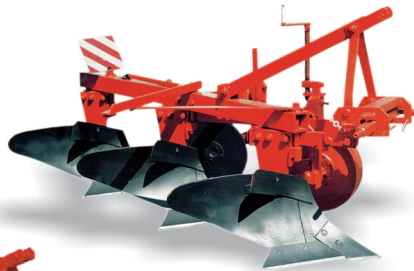

PLN-3-35P
MOUNTED
For conventional plowing



PLN-4-35P
MOUNTED
For conventional plowing

	PPN.7.30/50	PPN.8.30/50	PLN-3-35P	PLN-4-35P
Number of bases	7	8	3	4
Type of base	semidigger		semidigger	
Operating width of base, cm	30-50	30-45	35	
Base protection	Spring		No	
Plough operating width, m	2.1	2.4-4.0	1.05	1.4
Operating speed of travel, km/h	8-12		7-9	
Tilling depth, cm	27		27	
Possible capacity, ha/h	1.2-3.6	1.6-3.9	0.735-0.945	0.98-1.26
Plough dimensions, mm:				
length	8800	9560	2820	3350
width	3750	4120	1510	1920
height	1580	1580	1450	1540/1300
Weight, kg	1910	2500	450	775/760
Types of cultivated soils	Designed for tilling of agricultural weakly- and medium-stony soils with unit draft up to 0.09MPa		Designed for tilling of soils with grain and industrial crops, without stones, with unit draft up to 0.09MPa	
Tractor drawbar category to which the plough can be mounted	4	5	1.4	3 (2)
Manufacturer	Smorgon Assemblies Plant		Minsk Gear Factory	
Distinctions of plough	Adjustment of base width			